



Designed for high density wiring between components and within electronic equipment. LSZH cables ensure increased safety in the case of fire due to the virtual elimination of toxic fumes if burnt.

Used in aircraft, process control systems, computers, data processors, military vehicles & military equipment. Because of the mechanical design of these cables they should not be used for direct connection to mains power supplies.


Construction

0.22mm² stranded high conductivity tinned annealed copper conductors
 low smoke zero halogen (LSZH) core insulation
 Type A = unscreened,
 Type C = overall tinned copper wire braid screen,
 Type S = overall aluminium/polyester foil screen
 black LSZH outer sheath

Technical

conductor stranding:	7x 0.2mm diameter (0.22mm ² area)
bend radius:	7.5 x overall diameter (O/D) fixed
voltage rating:	440V RMS up to 1600Hz operating
current rating:	1 amp
conductor resistance:	92 Ohm/km maximum @ 20°C
temperature range:	0°C to +70°C flexible
standards:	construction generally to British Defence Standard 61-12 Part 4 flame retardant according to IEC 60332-1 smoke emission according to IEC 61034 halogen acid gas emission according to IEC 60754-1+2
core identification:	coloured to British Defence Standard Chart

Cable Reference Number	Number of Cores	Screening Option (type)	Overall Diameter (mm)	Overall Weight (kg/km)
7-2-2A LSZH	2	Type A (no screen)	3.4	14
7-2-3A LSZH	3		3.5	17
7-2-4A LSZH	4		3.8	22
7-2-6A LSZH	6		4.8	32
7-2-8A LSZH	8		5.6	47
7-2-12A LSZH	12		6.4	56
7-2-18A LSZH	18		7.4	82

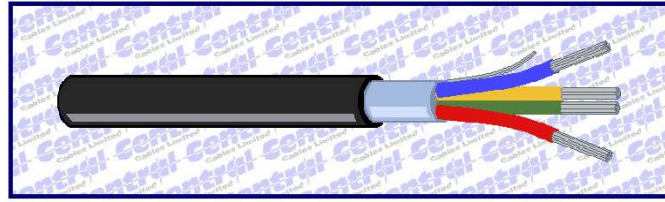

Cable Reference Number	Number of Cores	Screening Option (type)	Overall Diameter (mm)	Overall Weight (kg/km)
7-2-25A LSZH	25	Type A (no screen)	8.7	100
7-2-36A LSZH	36		9.8	146
7-2-2C LSZH	2	Type C (braid screen)	3.8	25
7-2-3C LSZH	3		4.0	29
7-2-4C LSZH	4		4.3	33
7-2-6C LSZH	6		5.6	57
7-2-8C LSZH	8		6.2	66
7-2-12C LSZH	12		6.9	87
7-2-18C LSZH	18		8.4	115
7-2-25C LSZH	25		9.5	153
7-2-36C LSZH	36		10.7	207
7-2-2S LSZH	2		Type S (foil screen)	3.7
7-2-3S LSZH	3	3.9		28
7-2-4S LSZH	4	4.1		31
7-2-6S LSZH	6	4.7		52
7-2-8S LSZH	8	5.7		60
7-2-12S LSZH	12	6.2		79
7-2-18S LSZH	18	7.9		103
7-2-25S LSZH	25	8.8		141

LSZH Properties: fairly tough & flexible material resistant to a wide range of oils & chemicals. Guarantees max. 0.5% HCL emissions if burnt. Also known as LSOH & LSHF (low smoke zero halogen/halogen free).

Not to be confused with LSF (low smoke and fume) for which may just mean modified PVC. There is no standard governing the hydrogen chloride (HCL) emissions of LSF so it may still be hazardous if burnt.

All measurements provided should be considered nominal and images for illustration purposes only. Although Central Cables Ltd has made every reasonable effort to ensure its accuracy, the information contained herein is subject to error or omission and to change without notice. In no event will Central Cables Ltd be liable for any damages whatsoever, arising in connection with the information described.