

These multicore fixed power cables are suitable for use indoors, outdoor, running through ducts or for direct burial. The steel wire armour provides protection against mechanical damage.

LSZH ensures increased safety in the case of fire due to the virtual elimination of toxic fumes if burnt.


Construction

- stranded plain annealed copper conductors
- cross linked polyethylene (XLPE) core insulation
- low smoke zero halogen (LSZH) bedding
- galvanised steel wire armour (SWA)
- black LSZH outer sheath


Technical

conductor stranding:	according to class 2 (VDE 0295 / IEC 60228 / BS EN 60228:2005)
bend radius:	1.5mm ² to 16mm ² = 6 x overall diameter fixed 25.0mm ² and above = 8 x overall diameter fixed
voltage rating:	600/1000V operating
current rating:	see SWA 90°C chart
temperature range:	-15°C to +90°C fixed, minimum bending 0°C
standards:	construction generally to BS6724 (where applicable) flame retardant according to EN 50265-2-1, EN 50266 C&A, IEC 60332-1-2, IEC 60332-3-24 (Cat C) smoke emission according to EN 50268-2, IEC 61034 halogen acid gas emission according to EN 50267, IEC 60754-1
core identification:	2-4 cores = coloured to VDE 0293 without earth (green/yellow) 3 & 4 core may be available with earth on request 5 cores = either coloured to VDE 0293 with earth or numbered as below 7+ cores = numbered white cores without earth

Number of Cores	Conductor Area (mm ²)	Overall Diameter (mm)	Overall Weight (kg/km)	Number of Cores	Conductor Area (mm ²)	Overall Diameter (mm)	Overall Weight (kg/km)
2	1.5	12.0	295	12	1.5	20.1	791
3	1.5	12.9	324	19	1.5	23.2	1030
4	1.5	13.7	367	27	1.5	27.7	1420
5	1.5	14.2	380	37	1.5	30.3	1750
7	1.5	15.6	463	48	1.5	32.3	2100

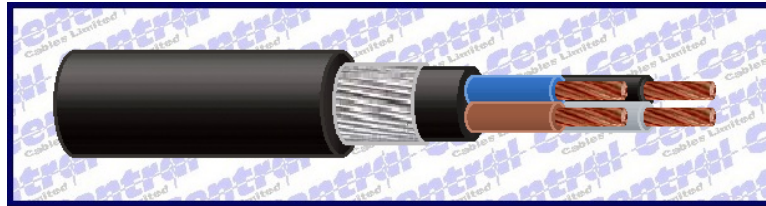

Number of Cores	Conductor Area (mm ²)	Overall Diameter (mm)	Overall Weight (kg/km)	Number of Cores	Conductor Area (mm ²)	Overall Diameter (mm)	Overall Weight (kg/km)
2	2.5	13.2	340	5	16.0	26.0	1750
3	2.5	13.8	392	7	16.0	28.1	2150
4	2.5	14.7	440				
5	2.5	16.1	480	2	25.0	24.3	1250
7	2.5	17.1	584	3	25.0	26.9	1720
12	2.5	22.0	950	4	25.0	29.1	2090
19	2.5	26.5	1500	5	25.0	31.0	2370
27	2.5	30.7	1928				
37	2.5	33.8	2300	2	35.0	27.9	1720
48	2.5	39.0	3010	3	35.0	29.6	2130
				4	35.0	32.1	2590
2	4.0	14.3	419	5	35.0	35.0	3150
3	4.0	14.9	460				
4	4.0	16.2	550	2	50.0	25.0	1750
5	4.0	18.0	600	3	50.0	28.0	2250
7	4.0	19.7	700	4	50.0	31.0	2850
12	4.0	25.0	1300	5	50.0	38.0	3850
19	4.0	35.2	2500				
				2	70.0	28.0	2200
2	6.0	15.4	490	3	70.0	32.0	3000
3	6.0	16.6	639	4	70.0	37.0	4100
4	6.0	18.3	780	5	70.0	43.0	5100
5	6.0	20.0	900				
7	6.0	21.9	1100	2	95.0	32.0	3000
				3	95.0	37.0	4150
2	10.0	17.9	700	4	95.0	40.0	5200
3	10.0	18.9	860	5	95.0	52.0	7700
4	10.0	21.1	1060				
5	10.0	22.0	1131	2	120.0	35.0	3600
7	10.0	25.0	1500	3	120.0	40.0	4950
				4	120.0	46.0	6700
2	16.0	20.0	900	5	120.0	56.7	9030
3	16.0	22.0	1100				
4	16.0	23.6	1350				

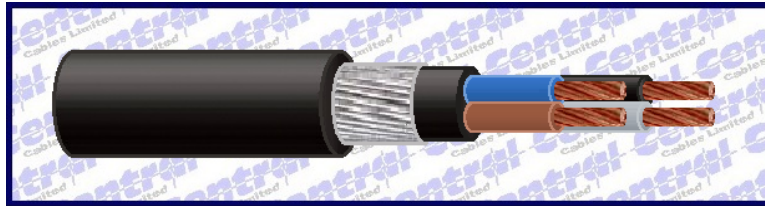

Number of Cores	Conductor Area (mm ²)	Overall Diameter (mm)	Overall Weight (kg/km)	Number of Cores	Conductor Area (mm ²)	Overall Diameter (mm)	Overall Weight (kg/km)
2	150.0	37.0	4250	2	240.0	48.0	6900
3	150.0	45.0	6300	3	240.0	56.0	9650
4	150.0	49.0	7900	4	240.0	62.0	12400
5	150.0	4.31	10752				
				3	300.0	59.0	11550
2	185.0	43.0	5500	4	300.0	66.0	14800
3	185.0	49.0	7650				
4	185.0	55.0	9650	3	400.0	65.0	14350
				4	400.0	75.0	19300

LSZH Properties: fairly tough & flexible material resistant to a wide range of oils & chemicals. Guarantees max. 0.5% HCL emissions if burnt. Also known as LSOH & LSHF (low smoke zero halogen/halogen free).

Not to be confused with LSF (low smoke and fume) for which may just mean modified PVC. There is no standard governing the hydrogen chloride (HCL) emissions of LSF so it may still be hazardous if burnt.

All measurements provided should be considered nominal and images for illustration purposes only. Although Central Cables Ltd has made every reasonable effort to ensure its accuracy, the information contained herein is subject to error or omission and to change without notice. In no event will Central Cables Ltd be liable for any damages whatsoever, arising in connection with the information described.